
wolfappliance.com

FEATURES

- Heavy-duty, stainless steel seamless construction.
- Internal, in-line or remote blower required (sold separately).
- Telescopic chimney.
- Front-mounted controls with LED indicator lights.
- Three-speed blower with boost to temporarily increase airflow.
- · LED lighting with high and low settings.
- Delay-off feature to automatically turn unit off.
- Filter clean indicator.
- · Dishwasher-safe filters.
- Transition with backdraft damper.





Model VI42S

Ю	-	M/Γ	$D \cap$	БТ	\sim	ıc
О	$-\omega$	ᄱ	вu	PTI	U)	V O

MODEL VI42S	CFM
Internal	300*, 600
In-line	600
Remote	600, 1200

*For make-up air restricted applications.

Cooktop hoods are recommended for use with Wolf induction, electric and gas cooktops and integrated modules. For Wolf ranges and rangetops, a pro ventilation hood is recommended.

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart).
- Remote control.
- Chimney extension.
- Recirculating kit and filter for nonducted applications.
- Make-up air damper.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.




wolfappliance.com

SPECIFICATIONS	
PRODUCT Dimensions Overall Height Weight	42"W x 6"H x 26 ¹ / ₂ "D 29 ¹ / ₄ " - 38" 110 lb
DISCHARGE Vertical	6" Round
ELECTRICAL Supply Service	110/120 VAC, 60 Hz 15 amp circuit
INSTALLATION Bottom of Hood to	Countertop 24" – 36"

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.

Dimensions may vary $\pm^{1/8}$ " (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

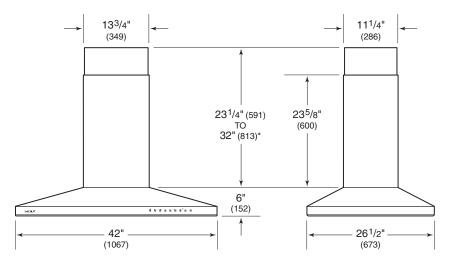

 $^{*}46^{1}\!/\!4"$ (1175) to 55" (1397) with accessory flue extension.